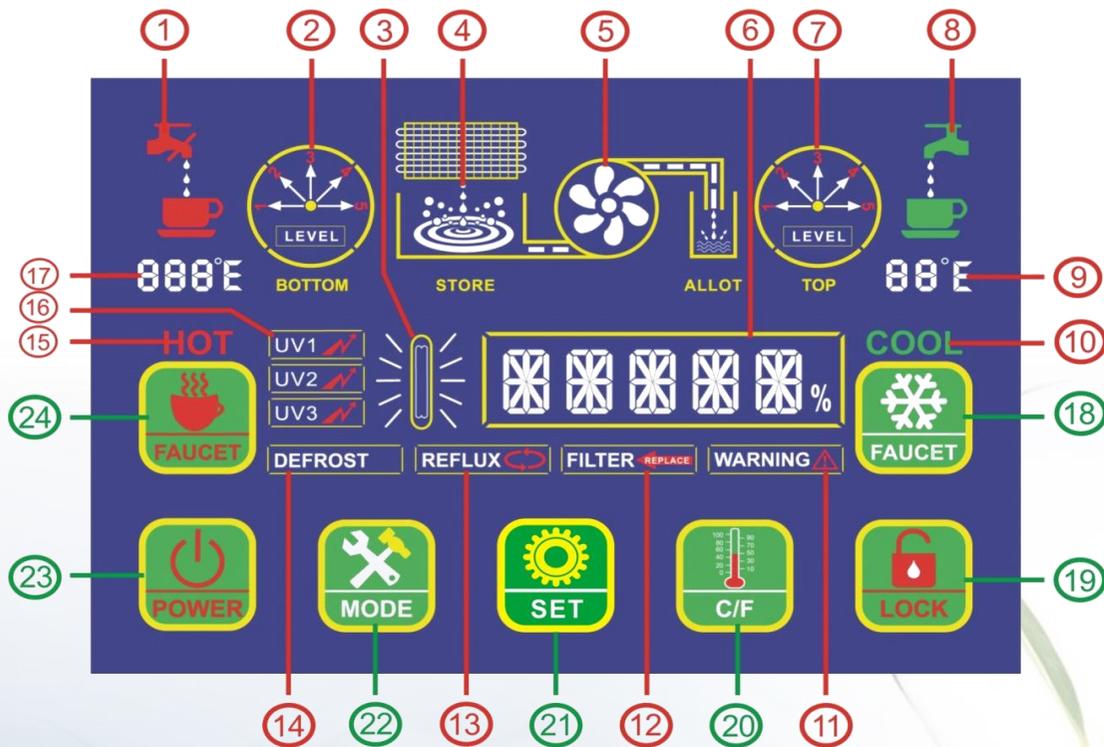


Set up



Your machine has gone through the Pre-Delivery Service and It's ready to start-up.



The first step is to connect it to the power supply network(Plug-in).

Once the machine is placed in the workplace, it must be at least **3 - 4 hours** at rest before turning it on, so that the compressor gas stabilizes.

The machine will take around 24 hours to fill all the tanks with water, in normal climatic conditions..

The machine can be configured using icons 21 and 22.

Screen Indicators

1		When the icon flashes, it means the tap is unlock to dispense hot water.	13	REFLUX 	Water is recirculating in the top tank when this icon flashes.
2		The arrow indicates water level, pointing at 1 means the bottom tank is empty, 5 means the bottom tank is full.	14	DEFROST	The unit is in the defrosting process when this icon flashes.
3		This icon will flash when one of the UV lights needs replacement.	15	HOT	Heating function enable/disable indicator
4		When this icon shows motion, the machine is generating water. When the icon lights on without motion, water generating stops. When the icon flashes, it means the water generating function has been shut off manually.	16		The icons are lit when UV is operating. Uv lamps operate intermittently. The icon will flash when one of the UV is faulty. UV1: Top Tank, UV2: Inline, UV3: Bottom Tank
5		The pump is working when the icon flashes.	17		The indicator displays current temperature of hot water.
6		Displays the current relative humidity.	18		Press and hold the icon to dispense cold water.
7		The arrow indicates water level, pointing at 1 means the top tank is empty, 5 means the top tank is full.	19		Press and hold the icon until the red tap flashes.
8		The icon flashes, when dispensing cold water.	20		Press the icon to switch water temperature display between Celsius and Fahrenheit.
9		The indicator displays current temperature of cold water.	21	 	Press the icon  and then press  to set preferred value. a. H-ON/OFF : Turn on/Turn off heating function. b. C-ON/OFF : Turn on/Turn off cooling function. c. W-ON/OFF : Turn on/Turn off water generation. d. H-075~095 : Adjusting hot water temperature (range: 75-95 °C). e. C-004~010 : Adjusting cold water temperature (range:4-10°C). f. T-*** : Displays filter use. Reset to zero on filter system usage period. g. RESET : reset to factory standard.
10	COOL	Cooling function enable/disable indicator	22		
11	WARNING 	When the icon flashes, the system is detecting a leak.	23		Press and Hold to start-up or shut off the machine.
12	FILTER 	Normally the icon stays lit. When it flashes, the filters needs to be replaced.	24	 	Press and Hold  until the red tap flashes.  Press and Hold  to dispense hot water.